DESCRIPTION OF THE WHARTON/ODA SYSTEM

David Oppenheim
James S. Ribeiro
E. Gerald Hurst, Jr.

EDITORS

79-12-02

LEVEL II

DESCRIPTION OF THE WHARTON/ODA SYSTEM

David Oppenheim
James S. Ribeiro
E. Gerald Hurst, Jr.

EDITORS

79-12-02

Department of Decision Sciences
The Wharton School
University of Pennsylvania
Philadelphia, PA 19104

DDC

JAN 21 1980

D

80 1 16 049

REPORT DOCUMENTATION PAGE	READ INSTRUCTIONS BEFORE COMPLETING FORM

1. REPORT NUMBER 79-12-02	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER

4. TITLE (and Subtitle)	5. TYPE OF REPORT & PERIOD COVERED
DESCRIPTION OF THE WHARTON/ODA SYSTEM	Technical Report
	6. PERFORMING ORG. REPORT NUMBER 79-12-02

7. AUTHOR(s)	8. CONTRACT OR GRANT NUMBER(s)
Operational Decision Aiding Project Staff David Oppenheim, James S. Ribeiro E. Gerald Hurst, Jr., Editors	N00014-75-C-0440

9. PERFORMING ORGANIZATION NAME AND ADDRESS	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
Department of Decision Sciences The Wharton School/Univ. of Pennsylvania Philadelphia, PA 19104	Task NR049-360

11. CONTROLLING OFFICE NAME AND ADDRESS	12. REPORT DATE Dec 79
	13. NUMBER OF PAGES 15

14. MONITORING AGENCY NAME & ADDRESS(If different from Controlling Office)	15. SECURITY CLASS. (of this report)
	Unclassified
	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

Approved for public release; distribution unlimited

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

(DASL) Decision Aiding Systems Laboratory; decision aiding; computer systems; display management; windows management

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

The purpose of this document is to give a brief introduction to the hardware available in the Wharton Computer Center and the Decision Aiding Systems Laboratory (DASL), and to summarize the software which has been developed at Wharton under the Operational Decision Aiding Project. More detail about most of these features is available; in particular, some of the other software developed for use on the Wharton system may be of interest to other contractors, now that the system is easily accessible via the ARPANET.

DD FORM 1473 EDITION OF 1 NOV 65 IS OBSOLETE
1 JAN 73
S/N 0102-014-6601 |

408 757

Decision Aiding Systems Laboratory

INTRODUCTION

This document provides a brief introduction to the resources available in the Decision Aiding Systems Laboratory (DASL), including a summary of software developed at Wharton under the Operational Decision Aids (ODA) project. Much of the software described below is accessible via the ARPANET, and may therefore be of interest to other contractors (see 1.2). Requests for additional information should be directed to Gerry Hurst of the Wharton Decision Sciences Department or to any other member of the Wharton ODA team.

This document is divided into three sections: section 1 describes the DASL environment, including relevant features of the Wharton Computer Center, which houses the host computer; section 2 describes the generalized decision aiding software developed under ODA; section 3 describes specific decision aids available.

1.0 ENVIRONMENT

The DASL environment includes the full resources of the Wharton Computer Center, an interface to the ARPANET, and a variety of specialized computer terminals and associated hardware.

1.1 Host Computer

The Wharton Computer Center houses a Digital Equipment Company DecSystem-10 (DEC-10) built around a KL10 processor. The system has 512K words of core storage, 600 megabytes of online disk storage on 4 disk drives, two 9-track, 1600 BPI tape drives, two line scanners which handle 128 terminal lines, a 300 line per minute printer, and IMP-10 and Pluribus VDA adapters which connect to the ARPANET.

The Wharton DEC-10 is currently running under version 6.03 of the TOPS-10 operating system, which uses disk "virtual memory" to increase direct storage capacity from the 512K words of "real" core storage up to the limit addressable by the KL10's 18-bit address space. Virtual memory not only enables the system to handle programs whose core requirements exceed the amount of core storage available, it also facilitates control of programs which would otherwise require nearly all of the system's core storage, and therefore hamper processing of other jobs running concurrently.

Operating system control of the user interface is based on personalized log-in. Individual users are identified independently of the project number(s) to which they have access, which enables the system to exchange messages between individual users (both synchronously and asynchronously), maintain histories of program use, and exercise budgetary controls.

The Wharton Computer Center currently supports APL, BASIC, BLISS, COBOL, FORTRAN, MACRO-10, PASCAL, and POP, and maintains an extensive library of FORTRAN and APL functions and programs. Canned program packages include BMDP, EMPIRE, IDA, LINDO, and SPSS. Also available is a wide assortment of unique experimental software for planning, office automation, database management, etc., in various stages of development.

1.2   ARPANET

An interface to the ARPANET allows programs running in the DEC-10 to use the ARPANET as a standard I/O device. It also permits users logged in at the DEC-10 to log in at remote hosts using the Telnet protocol. Similarly, users logged in to remote hosts may log in at the DEC-10. It is also possible to exchange messages and data files between host computers connected by the ARPANET.

1.3   Specialized Hardware

In addition to the resources of the Wharton Computer Center and the ARPANET, a variety of computer terminals and associated hardware especially useful in decision support applications is available in the DASL.

1. The Datamedia 1520A is a standard, 24 x 80 character, video compatible, white on black CRT terminal. One Datamedia 1520A is currently available.

2. The Concept 100 is a 24 x 80 character, black and white CRT terminal with a built-in microprocessor which provides local storage as well as a number of sophisticated operating features, such as reverse video, multiple input and output ports whose characteristics can be varied, function buttons, and a variety of control and programmer options. (In fact, this terminal was designed to include in its firmware many features, such as "windows", which were developed by the ODA project (see section 2).) Several Concept 100's are currently

available.

3. The <u>ADDS MRD400</u> is an eight color display generator
    with an upper-case-only alphanumeric character set.
    It uses a standard red-green-blue (RGB) television
    monitor and generates a screen of 24 x 80
    characters. It has a limited graphics capacity,
    which makes it suitable for displaying bar charts,
    trend curves, and the like. One ADDS MRD400 is
    currently available.

4. The <u>Tektronix 4013</u> is a high resolution,
    direct-view storage display with the full ASCII and
    APL character sets. One Tektronix 4013 is
    available, together with a Tektronix 4010 hard copy
    unit for use with the 4013.

5. There are several hard copy terminals of various
    kinds on which reports such as this one are
    produced.

6. The <u>Grinnell GMR-26</u> is a 480 x 512 color raster
    graphics device which is driven by an LSI-11
    microcomputer. The LSI-11 has 32K words of core
    storage and dual floppy disk drives, and is
    currently running under version 3 of the RT-11
    operating system. It has a serial link to the
    DEC-10, and a bidirectional interface to the
    GMR-26. The combination of the GMR-26 and the
    LSI-11 provides a full range of graphics
    capabilities.

    Associated with the GMR-26 is a <u>trackball</u> device,
    which permits the user to manually position a
    visible cursor anywhere on the face of the graphics
    screen with a high degree of precision. The
    trackball can be used to draw continuous contours
    on the screen, and to select from program-generated
    menus.

7. The <u>VOTRAX Voice Synthesizer</u> can produce 64
    different phonemes at four inflection levels on the
    basis of commands issued by the computer. It may
    be used to redirect the user's attention to the
    screen, or to inform the user of some condition not
    currently being displayed. The VOTRAX does not
    function in any way as an input device. One VOTRAX
    is currently available.

8. The <u>Advent Videobeam Projector</u> is used to enlarge
    displays to dimensions suitable for group viewing.
    It is a seven-foot commercial color television
    which projects onto a specially constructed
    reflective screen, and accepts input from an

ordinary television tuner, from standard video, or
from RGB video signals such as are produced by the
Grinnell graphics system described above. The
Advent may be used to project both "live" and
videotaped material. Two Advent Videobeam
Projectors are available.

2. There are also facilities for videotaping displays.
Several recording and playback units are available,
along with sophisticated editing equipment, which
enables contractors to produce videotapes of
demonstrations, mixing signals from two terminals
(e.g. graphics and alphanumeric) together with
signals from color or black and white cameras. The
standard is the U-matic cassette, a 3/4 inch color
(or black and white) videotape with two audio
tracks. Though most of the equipment is SONY, it
is compatible with the products of most other
manufacturers, such as JVC and Panasonic. (Note:
Betamax is a 1/2 inch cassette, and therefore
incompatible.)

2.0 DECISION AID SUPPORT SOFTWARE

Much of the work done at Wharton under ODA has been
directed at enhancing the interface between the user and
specific computer decision aids by developing generalized
software which, though largely transparent to the user,
nevertheless improves the user's command of the decision-
aiding resources available. Because the software described
below is independent of specific decision aids, it is of use
in development and testing of decision aids as well as in
their use. Figure 1 shows the four major components of the
aid support system, each of which is considered separately.

2.1 Window Management

The window package is designed to overcome limitations
upon the effectiveness of specific computer decision aids
which follow from the fact that the user is restricted to
interacting with one computer process at a time. The
drawbacks of this restriction are obvious when the use of a
single computer decision aid is contrasted to a more
conventional decision-making environment: here, the
decision-maker has access to a variety of different sources
of information such as books, maps, charts, graphs, and
notes jotted down earlier in the process, and may express
the results of various stages of the process in a variety of
forms on any number of blank sheets of paper, chalkboards,
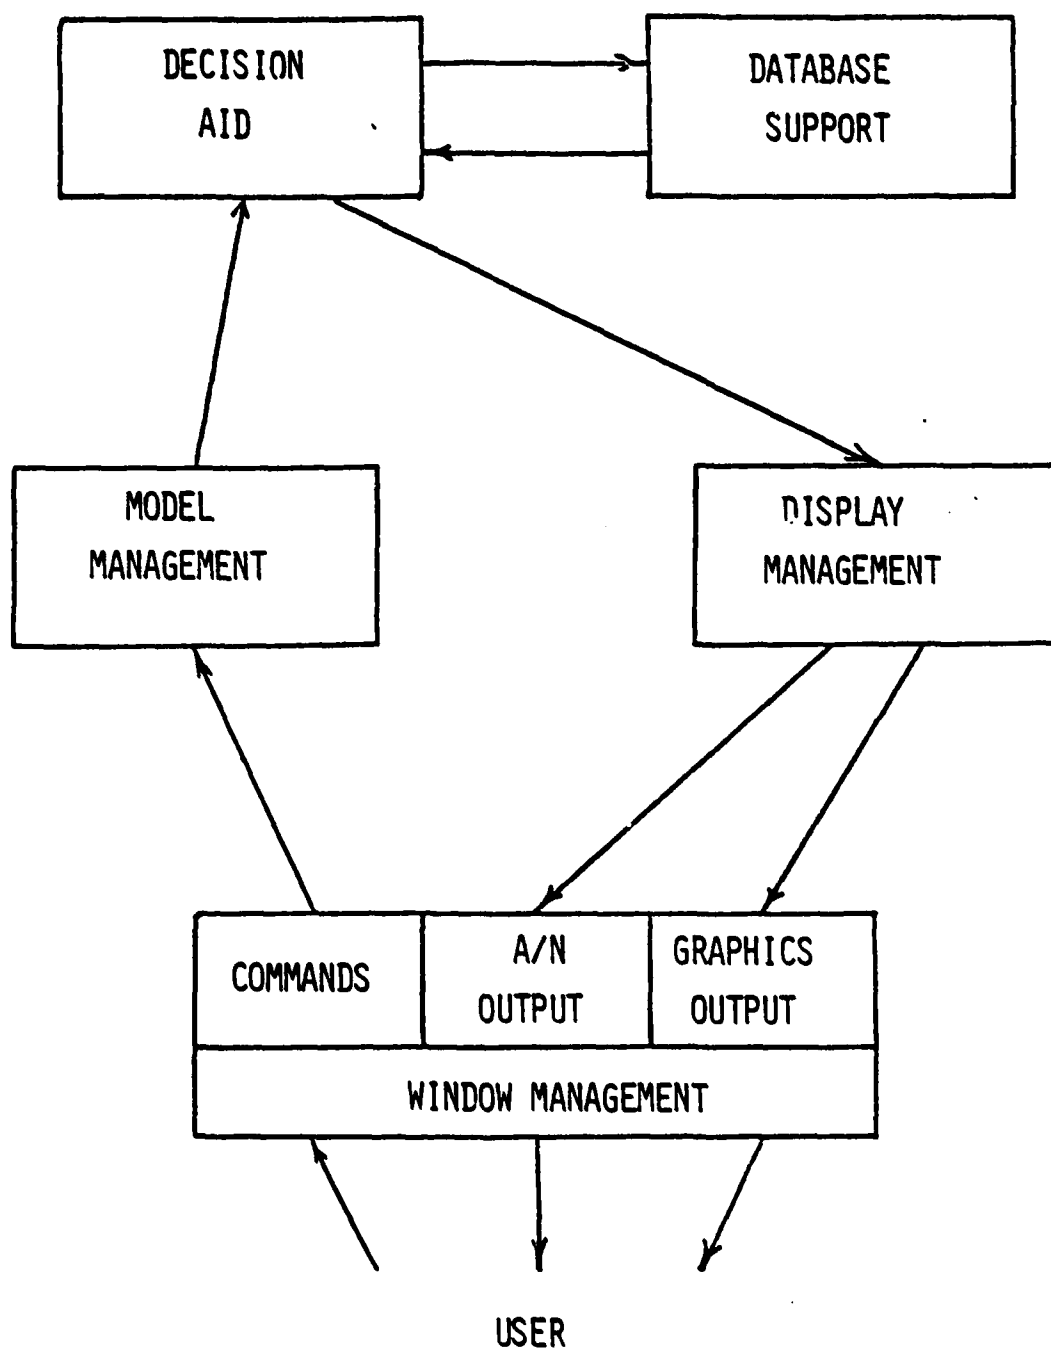
DECISION AID SUPPORT SYSTEM

Figure 1

etc, some of which will be consulted later in the decision
making process, some preserved in formal reports, and some
discarded.

The window approach aims at approximating this
diversity and flexibility of inputs and outputs by allowing
the user to interact with more than one computer process at
a time from a single terminal. This is accomplished by
providing for the dynamic definition of several logical
windows, each of which functions as an independent
communication path between the user and a computer process.
The information in a logical window is displayed through a
physical window, which is a user-defined subset of the
physical display area of the computer terminal. Thus, the
user may enter commands or input data for one computer
process, while at the same time receiving output from other
computer processes, with the output of each different
computer process appearing in a different area of the
terminal screen.

Logical and physical windows are defined independently
of one another, and may be reconfigured at any time by
entering simple command strings. Logical windows are
variable with regard to height and width, I/O function,
prompting, and the retention of data no longer in the
physical window. User-defined properties of physical
windows include dimensions and location on the screen,
border character, and fore- and background colors.

In addition to providing for the definition of logical
and physical windows, the command language enables the user
to transfer from one logical window to another, create
computer processes and connect them to specified logical
windows, clear individual physical windows, display a
specified logical window thru a specified physical window,
and query the status of both physical and logical windows.
Frequently used command sequences (such as window
definitions) may be loaded from pre-established disk files
by entering a single command.

2.2 Model Management

Model management involves the development of a
methodology for the analysis of both structured and
unstructured problems which is of sufficient generality to
be effective in a range of applications. The basis of this
approach is the separation of user, problem definition, and
problem solution, and the establishment of standard
interfaces between them. The primary objectives of model
management software are first to assist the user in
structuring the problem at hand so that available analytical
tools can be brought to bear in generating possible

solutions, and then to facilitate the processing and analysis of resulting structural representations of the problem.

A prototype model management system (MMS) is being developed within the ONRODA context to support the use of various analytical techniques provided by the contractors. It consists of three major functional subsystems, namely model development, model processing, and model administration, all of which interact directly with a "model knowledge base". This MMS database includes a number of general models, each of which is the logical representation of of a well-structured and easily identifiable process, such as linear programming or inventory analysis, in terms of a set of entities, a set of relationships, and a set of assumptions. Entities and relationships are defined in terms of a set of attributes, each of which represents either an input or an output of the general model. Associated with each general model is a solution process which represents the actual programming code needed to solve the model.

The model develoment function is based on model building, a process which involves the generation of one or more model structures, each of which is a specific instance of a general model identified as applicable to some aspect of the problem at hand. The model structure projects the general model onto the problem at hand by providing a logical link between attributes of the general model and both input data supplied either by the user or by some previous model building process, and output data to be stored, reported, or supplied to a subsequent model building process.

Model processing is a matter of generating the actual programming code required to solve the problem at hand. This is accomplished by linking each model structure to a solution process via the corresponding general model. Because the input and output requirements of each solution process are specified in terms of a general model, the same solution process may be used for many different model structures.

Model administration is concerned with the validation and maintenance of models, including monitoring processing for violations of model assumptions, and informing users of such violations as they occur.

Development efforts to date have focused on design of the database and implementation of preliminary features of the dictionary function. The dictionary function is an important aspect of the model building process in that it assists the user in determining what types of model structures, general models, and solutions processes exist.

ASTDA models and solution software have been "dictionaried"
and represented in the model knowledge base (see 3.1).

2.3 Display Management

A family of generalized graphics software developed
under ODA serves as an interface between decision aiding
systems and the DASL graphics hardware described above in
section 1. These utilities make it possible for both
computer decision aids and users to exploit a wide range of
graphics capabilities by issuing simple commands. In this
way, decision aids can benefit from sophisticated graphics
hardware without incurring the cost of specialized graphics
programming.

2.3.1 Graphics Primitives - DASL graphics software is
based on a library of graphics primitives designed to
support the Grinnell graphics system (see 1.3). Though
these "G-routines" are implemented in FORTRAN and reside on
the LSI-11, they are normally referenced by programs which
are running on the DEC-10, and which may be written in any
language for which a "G-interpreter" program is available
(currently APL, FORTRAN, PASCAL, and POP).

The basic graphics vocabulary includes lines, empty or
solid polygons and discs, and alphanumeric characters, all
of which may be displayed in any color and size. By
combining commands, displays of arbitrary complexity can be
achieved.

2.3.2 Paging - This feature of the graphics support
software enables the user to treat the graphics display area
as several independent "pages", each of which is constructed
using the graphics primitives described above, just as if it
were an actual display. Since the construction of a
graphics page is distinct from its being displayed, it is
possible to store and quickly retrieve several different
displays, much as one uses a slide projector to view a
number of slides one at a time.

It is also possible, however, to treat the various
pages as if they were transparencies which can be
superimposed to yield a composite picture. As in the case
of such transparencies, the order in which graphics pages
are "stacked" can easily be changed by the user. Moreover,
since one or more pages can be inserted into or removed from
the display stack while the rest are held fixed, it is easy
to produce displays in which variable foreground figures

such as solid bars, are viewed against a constant
background, such as labelled coordinates, to dramatize
comparisons.

Although a given page may contain the full range of
colors (i.e. 512) provided by the Grinnell system, the
number of pages available is limited by the number of colors
to be used on each page. Paging is available both to
programs which reference G-routines and to SLIDES users.

2.3.3 Slides - The SLIDES program puts the full range of
DASL graphics capabilities at the user's fingertips by
providing for the construction of graphic displays from an
alphanumeric terminal. Following start-up procedures which
establish the interface between the DEC-10 and the Grinnell
graphics system, the user creates each slide by entering the
text to be displayed along with certain control information.
This control information includes graphics commands which
specify figures to be drawn, text size, position, and color,
and formatting commands patterned after the DEC Runoff
package for document preparation.

The user may choose just to display each slide as it is
constructed, or in addition to "record" a series of slides
in a file which may be "played back" at some later time.
Since the Grinnell system is video compatible, displays
produced by SLIDES may be videotaped directly, photographed
from the screen, or transmitted to any reproduction process
which accepts video input. The strength of this approach to
the production of slides for formal presentation lies in its
direct connection with the decision aids and other DASL
software.

2.4 Database Support

To support the development and testing of decision
aiding software, the DASL has available an experimental
database which is maintained on a CODASYL-like database
management system.

2.4.1 ONRODA Database - Under contract to ONR, CTEC Inc.
[2] has developed a data set suited to testing decision aids
which address ONRODA Strike and Amphibious Warfare
Scenarios. The data, which have been structured by the
Wharton ODA project team, fall into six categories.

1. **Operations Area**: Physical data on terrain, oceanographic, and meteorologic characterisics of the operations area, and economic data on the location, size, and density of population centers and major economic assets.

2. **Technical Data**: Specifications and performance characteristics of ships, submarines, aircraft, satellites (own and enemies), and associated weapons, communications, and surveillance systems.

3. **Naval Order of Battle**: Information on actual and possible targets.

4. **Naval Status of Forces**: Data on the operational readiness of own forces, including information on personnel, ships, and equipment.

5. **Logistics**: Information on the current supply and inventory situation, together with projected replenishment schedules for fuel, ammunition, spare parts, food, medical supplies, and miscellaneous stores.

6. **Plans and Contingencies**: Records of daily operations, planned movement of own ships, contingency plans, as well as the content, location, status and probable objectives of enemy forces in the operations area.

2.4.2 SEED - SEED [7] is a CODASYL-compatible, network type database management system which supports all aspects of database design, implementation, maintenance, and use. Design functions are supported by a pair of File Definition Processors (FDP & SUBFDP) which generate both the overall database structure, or schema, and various user-specific sub-schemas through which the database is accessed. There are a variety of ways of accessing SEED databases, including Data Manipulation Languages (DML) for use in both FORTRAN and COBOL programs, as well as an interactive DML (DBLOOK), and an English-like query language/report writer (HARVEST). Database maintenance software includes a transaction oriented loader (SPROUT), plus utilities for database initialization and trouble shooting (DBINIT, DBDUMP, SCDUMP, and DBSTAT).

The user defines the database structure by entering Data Definition Language (DDL) commands which specify elementary data items, together with their physical groupings into records, pages, and areas, and their various logical groupings into sets. Items may be members of any

number of sets, and may stand to one another in one-one,
one-many, many-one, and many-many relationships. Schema DDL
commands also specify the order in which records are added.

Sub-schema DDL commands specify the subset of the
database which a given user intends to access, as well as
the programming language which will be used to access it.

SEED databases can be accessed by FORTRAN and COBOL
programs which include appropriate DML commands. These
commands enable the user program to open, close, search,
update, query the status of, and report error conditions in
the database. DBLOOK is an interactive DML which provides,
in addition to data retrieval and manipulation capabilities
of the FORTRAN and COBOL DML's, access to information on the
structure and status of the database.

The HARVEST query language/report writer [5] makes any
SEED database accessible to users who have no knowledge of
the structure of the database. In response to simple
English-like commands, HARVEST retrieves data and either
displays it immediately, or generates a report in which the
information is selected, sorted, and formatted as requested
by the user. Also available are user-defined variables and
summaries such as totals and averages.

The creation and updating of SEED databases is
facilitated by SPROUT [8], a utility which automatically
loads data from a transaction file on the basis of simple
commands entered in the Transaciton Definition Language
(TDL). These commands associate the transaction file with a
particular sub-schema of the database to be updated, define
relevant data fields in the transaction file, and specify
how the new data are to affect the database. The TDL is
flexible enough to permit any number of database records to
be created or updated by any number of transaction file
records. It also allows for the processing of
hierarchically structured and clustered data.

Other SEED utilities include DBINIT, which initializes
a new database prior to the entry of data; DBDUMP, which
displays the contents of selected database pages; SCDUMP,
which displays encoded representations of schemas and
sub-schemas; and DBSTAT, which displays database usage
statistics.

3.0 SPECIFIC DECISION AIDS

Two decision aids developed by ONR contractors have
been implemented and tested, and are currently available in
the DASL.

3.0.1 EWAR - The Electronic Warfare decision aid (EWAR) is
a research prototype developed by Decision Science
Applications [6] to explore the value of computerized
decision aids in the construction of emission control
(EMCON) plans for naval task forces. The objective of an
EMCON plan is to optimize the tradeoff between the
surveillance advantage to be gained by having electronic
detection and communication devices turned on, and the
protection advantage to be gained by turning such devices
off, thereby denying to the enemy information on the
location and identity of ships. A complete EMCON plan is
thus a specification of the state (i.e. on or off) of each
such device. Alternative EMCON plans are developed in the
context of an hypothetical enemy strike capability, and
evaluated on the basis of projections of the relative
effective task force "values" surviving such an attack. All
data referenced by EWAR resides on the ONRODA database and
is accessed _via_ SEED (see 2.3 above).

EWAR assists the user in developing EMCON plans by
placing at his or her disposal a wide variety of visual
representations designed to highlight features of the
situation relevant to the comparison of alternative EMCON
plans, and by providing quantitative bases for, and carrying
out calculations necessary to, such comparisons. Among the
graphics available are map-like displays of task force
disposition upon which are superimposed maximum radar
detection range or cumulative probability of detection
contours.   Tabular displays supply relevant technical data
on enemy weapons and task force radar systems, plus the
results of calculations of the effects of specific EMCON
plans on the probabilities of enemy identification of task
force elements, consequent allocation of strike
capabilities, and projected outcomes in terms of surviving
task force value.   The tradeoff between surveillance and
information denial involved in a given EMCON plan is
represented by a graph in which both surveillance and
information denial "scores" are plotted against the relative
weights assigned to information and surveillance in such a
way that the user can determine, for any choice of relative
weights of surveillance and information denial, which EMCON
plan is best.

EWAR was tested in the DASL during July and August of
1979 by Applied Psychological Services [1]. The experiments
compared the quality of EMCON plans developed with and
without benefit of EWAR.   The subjects were 16 Annapolis
officers, each of whom worked 8 problem scenarios.   The
experimental design involved two levels of subject training,
two levels of problem difficulty, and two levels of aid
sophistication.   A within subject design was employed, in
which each subject was exposed to both levels of problem
difficulty and both levels of aid sophistication.   A
complete report of these experiments is available in [1].

3.1 ASTDA

Analytics Strike Timing Decision Aid (ASTDA) [3] addresses the hypothetical attack of blue forces against orange forces on ONRODA Island. The strike mission is divided into five segments--launch, enroute to target, over target, return to base, and landing. Conditioning factors, some of which are discrete and some continuous, include own force readiness, enemy air defenses, weather at target, and weather at carrier. ASTDA incorporates two algorithms based on state and outcome calculator approaches which provide, for each of several possible launch times, both an expected value, and a spread of realizable values for utility. Both algorithms can perform sensitivity analysis on any of the conditioning elements.

Six different types of visual output are provided, including both tabular data for alphanumeric terminals, and graphics for the Grinnell system. These displays show weather probabilities, initial force numbers, force losses, or resulting utilities as a function either of launch time or of misssion segment for a given launch time.

ASTDA has been tested in the DASL environment by Applied Psychological Services [4]. The experimental design involved five ASTDA variations, two levels of problem difficulty, and two levels of operational experience on the part of subjects. 60 subjects were tested, the inexperienced group being NROTC members, and the experienced group being lieutenants and captains having some flight experience. Reference [4] describes the methods, procedures, and results of these experiments.

CONCLUSION

Ongoing DASL research includes further development of existing decision aid support software, implementation and testing of additional decision aids, and beginning work on the integration of existing decision aids through incorporation in the evolving model management system.

The window package will be enchanced by the inclusion of a more sophisticated user interface which facilitates both configuration and use of windows, provides different levels of prompting for different types of users, and automatically logs all traffic going through a window for study at a later time. Attention will also be given to increasing compatibility with specific aids.

Development of the model management system will continue, with emphasis on improving the dictionary function and implementing aid-independent control options which would permit the user to decide whether (e.g.) simulation or optimization is to be done for a given model. A control

mode of special interest would be a "deviation inquiry"
mode, in which actual data could be compared to their
projected values so that decision makers could be alerted to
the occurance of problem conditions.

A primary focus of new work in display management will
be the development of a general strategy for the linking of
human decision maker, computer decision aid, and the various
kinds of terminal devices so as to maximize human
effectiveness. In addition, higher level or "macro" calls
will be implemented for the graphics library, and display
formats for the Grinnell system will be augmented to
maintain DASL graphics capability at the state of the art.

In general, current DASL research is aimed at
consolidating scattered results obtained to date, enhancing
linkages between them, and generalizing existing
human-machine interfaces across all of the decision aids
developed under ODA.

References

1. ASTDA Test Report [forthcoming].

2. CTEC, Inc., Information Support for Operational
    Decision Aids. (Technical Report 57283) CTEC, Inc.
    May 1977. (AD A041 223).

3. Epstein, S. et al, Operational Decision Aids: the
    Application of Nomography and Uncertainty Analysis
    to Decision-Aiding Systems. (Technical Report
    1218-A) Analytics, Inc., November 1977. (AD A049
    545).

4. EWAR Test Report [forthcoming].

5. HARVEST Reference Manual, International Database
    Systems Inc., Philadelphia, Pa.

6. Pugh, G.E. et al, An Emissions Control Decision
    Aid. (Technical Report DSA-66) Decision-Science
    Applications, Inc., July 1978.

7. SEED Reference Manual, International Database
    Systems Inc., Philadelphia, Pa.

8. SPROUT Reference Manual. International Database
    Systems Inc., Philadelphia, Pa.

Director, Engineering Psychology
Programs (Code 455)
(5 cys)
Office of Naval Research
800 North Quincy Street
Arlington, Virginia 22217

Dr. A. L. Slafkosky
Scientific Advisor
Commandant of the Marine Corps
Code RD-1
Washington, D. C. 20380

Assistant Chief for Technology,
Code 200
Office of Naval Research
800 North Quincy Street
Arlington, VA 22217

Defense Documentation Center
(12 cys)
Cameron Station
Alexandria, VA 22314

Analysis and Support Division,
Code 230
Office of Naval Research
800 North Quincy Street
Arlington, Virginia 22217

CDR Paul Chatelier
DUSDRE
Pentagon, Room 3D129
Washington, D.C. 20301

Naval Analysis Programs, Code 431
Office of Naval Research
800 North Quincy Street
Arlington, Virginia 22217

Capt. Roger Granum
Office of Assistant Secretary of
Defense (Intelligence), Pentagon
Washington, D. C. 20301

Operations Research Program, Code 434
Office of Naval Research
800 North Quincy Street
Arlington, Virginia 22217

Dr. Stephen Andriole
Director
Cybernetics Technology Office
Defense Advanced Research Projects
Agency
1400 Wilson Boulevard
Arlington, Virginia 22209

Statistics and Probability Program,
Code 436
Office of Naval Research
800 North Quincy Street
Arlington, Virginia 22217

Personnel Logistics Plans, OP987P10
Office of the Chief of Naval
Operations
Department of the Navy
Washington, D. C. 20350

Information Systems Program, Code 437
Office of Naval Research
800 North Quincy Street
Arlington, Virginia 22217

Commanding Officer
Office of Naval Research Branch Office
ATTN: Dr. Charles Davis
536 South Clark Street
Chicago, Illinois 60605

Commanding Officer
Office of Naval Research Branch Office
ATTN: Dr. J. Lester
495 Summer Street
Boston, MA 02210

OP-940
Office of the Chief of Naval
Operations
Washington, D. C.   20350

Dr. C. Peterson
Decisions and Designs, Inc.
8400 Westpark Drive, Suite 600 Box 907
McLean, Virginia   22101

Mr. L. A. Aarons
R&D Plans Division
Office of the Chief of Naval
Operations
OF-987C
Washington, D. C.   20350

Mr. George Pugh
Decision-Science Applications, Inc.
1401 Wilson Blvd.
Arlington, VA 22209

Commander, Naval Electronics
Systems Command
Command and Control Division,
Code 530
Washington, D. C.   20360

Mr. David Walsh
Integrated Sciences Corporation
1640 5th Street
Santa Monica, CA 90401

Commander, Naval Electronics
Systems Command
C^3 Project Office
PME 108-1
ATTN: G. Hamilton
Washington, D. C.   20360

Dr. Amos Freedy
Perceptronics, Inc.
6271 Variel Avenue
Woodland Hills, CA 91364

LCDR Charles Theisen
Naval Air Development Center,
Code 4024
Warminster, PA 18974

Dr. Miley Merkhofer
Stanford Research Institute
Decision Analysis Group
Menlo Park, CA 94025

Dr. S. D. Epstein
Analytics
2500 Maryland Road
Willow Grove, PA 19090

Mr. Robert Garnero
Stanford Research Institute
Naval Warfare Research Center
Menlo Park, CA 94025

Mr. Harold Crane
CTEC, Inc.
7777 Leesburg Pike
Falls Church, VA 22043

Dr. H. L. Morgan
University of Pennsylvania
Wharton School
Philadelphia, PA 19174

Dr. Robert Andrews
Organizations & Systems Research
Laboratory
U. S. Army Research Lab
5001 Eisenhower Avenue
Alexandria, VA 22333

M. L. Metersky
NAVAIRDEVCEN, Code 5424
Warminster, PA 18974

4

Mr. Victor [illegible]
Naval Ocean Systems Center
Code 230
San Diego, CA 92152

[illegible]
[illegible]
Hoffman Bldg. #1
[illegible]
Alexandria, VA 22332

Commander, Naval Electronics
Systems Command
ELEX-03
Washington, D. C. 20360

Dr. Chantee Lewis
Management Department
Naval War College
Newport, R. I. 02840

Dr. John Shore
Code 5403
Communications Sciences Division
Naval Research Laboratory
Washington, D. C. 20375

Dr. Arthur Siegel
Applied Psychological Services
Science Center
404 E. Lancaster Street
Wayne, PA 19087

Dr. Meredith Crawford
Department of Engineering Administration
George Washington University (Suite 805)
2101 L Street, N.W.
Washington, D.C. 20037

Dr. Robert Brandenburg
ACCAT
Naval Ocean Systems Center
San Diego, CA 92152

Mr. Merlin Malehorn
Office of the Chief of Naval Operations
Op 991B
800 N. Quincy Street
Arlington, Virginia 22217